

MIT 6.035


Unoptimized Code Generation

From the intermediate
representation to the machine
code


Outline

- Introduction
- Machine Language
- Overview of a modern processor
- Memory Layout
- Procedure Abstraction
- Procedure Linkage
- Guidelines in Creating a Code Generator

Anatomy of a compiler

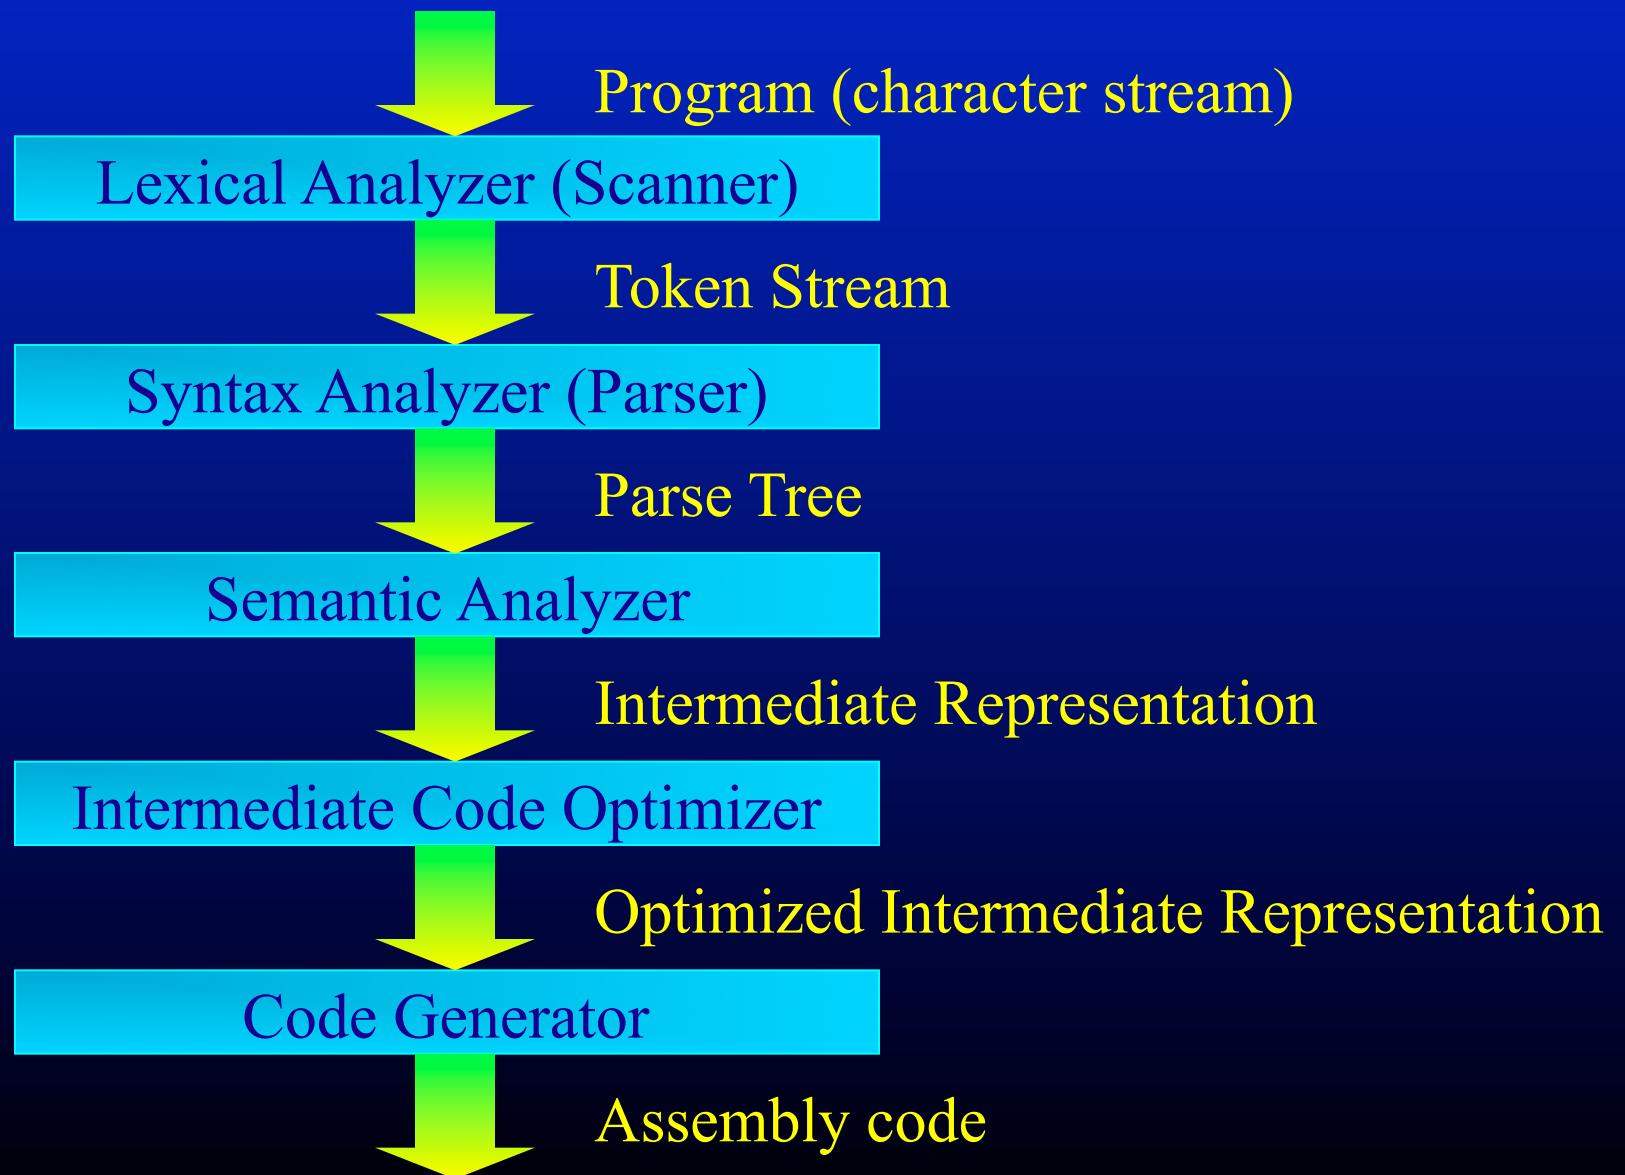

Anatomy of a compiler

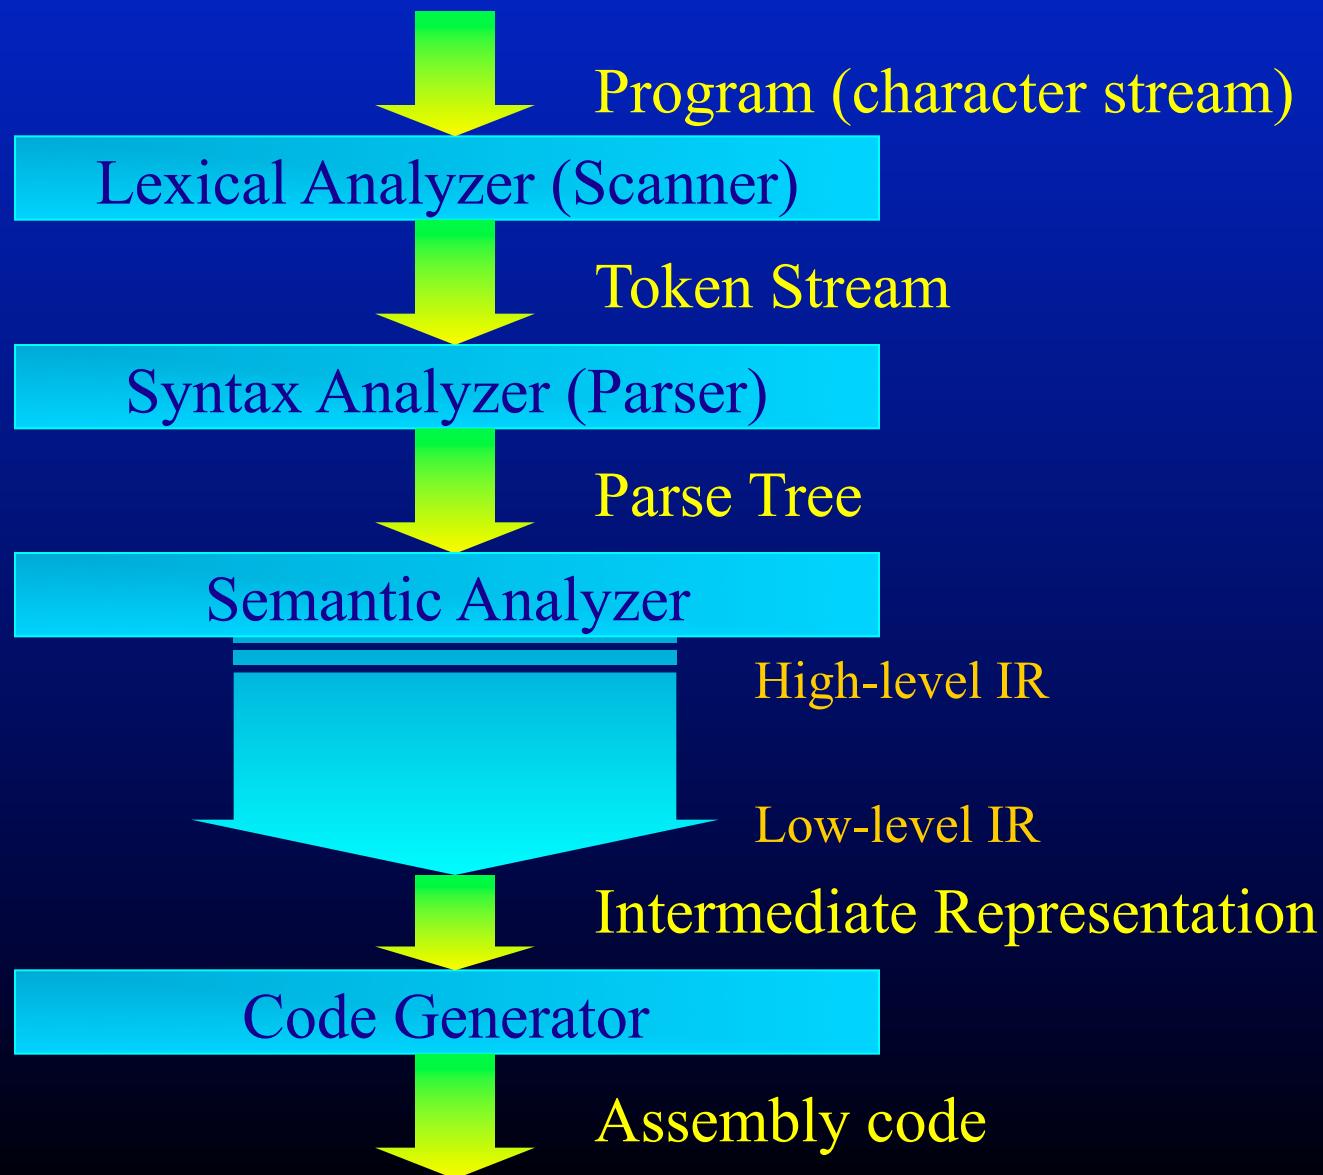

Components of a High Level Language

CODE

Procedures

Control Flow

Statements

Data Access

DATA

Global Static Variables

Global Dynamic Data

Local Variables

Temporaries

Parameter Passing

Read-only Data

Machine Code Generator Should...

- Translate all the instructions in the intermediate representation to assembly language
- Allocate space for the variables, arrays etc.
- Adhere to calling conventions
- Create the necessary symbolic information

Outline


- Introduction
- **Machine Language**
- Overview of a modern processor
- Memory Layout
- Procedure Abstraction
- Procedure Linkage
- Guidelines in Creating a Code Generator


Machines understand...

LOCATION	DATA
0046	8B45FC
0049	4863F0
004c	8B45FC
004f	4863D0
0052	8B45FC
0055	4898
0057	8B048500
	000000
005e	8B149500
	000000
0065	01C2
0067	8B45FC
006a	4898
006c	89D7
006e	033C8500
	000000
0075	8B45FC
0078	4863C8
007b	8B45F8
007e	4898
0080	8B148500
	000000

Machines understand...

LOCATION	DATA	ASSEMBLY INSTRUCTION
0046	8B45FC	movl -4(%rbp), %eax
0049	4863F0	movslq %eax,%rsi
004c	8B45FC	movl -4(%rbp), %eax
004f	4863D0	movslq %eax,%rdx
0052	8B45FC	movl -4(%rbp), %eax
0055	4898	cltq
0057	8B048500	movl B(,%rax,4), %eax
	000000	
005e	8B149500	movl A(,%rdx,4), %edx
	000000	
0065	01C2	addl %eax, %edx
0067	8B45FC	movl -4(%rbp), %eax
006a	4898	cltq
006c	89D7	movl %edx, %edi
006e	033C8500	addl C(,%rax,4), %edi
	000000	
0075	8B45FC	movl -4(%rbp), %eax
0078	4863C8	movslq %eax,%rcx
007b	8B45F8	movl -8(%rbp), %eax
007e	4898	cltq
0080	8B148500	movl B(,%rax,4), %edx

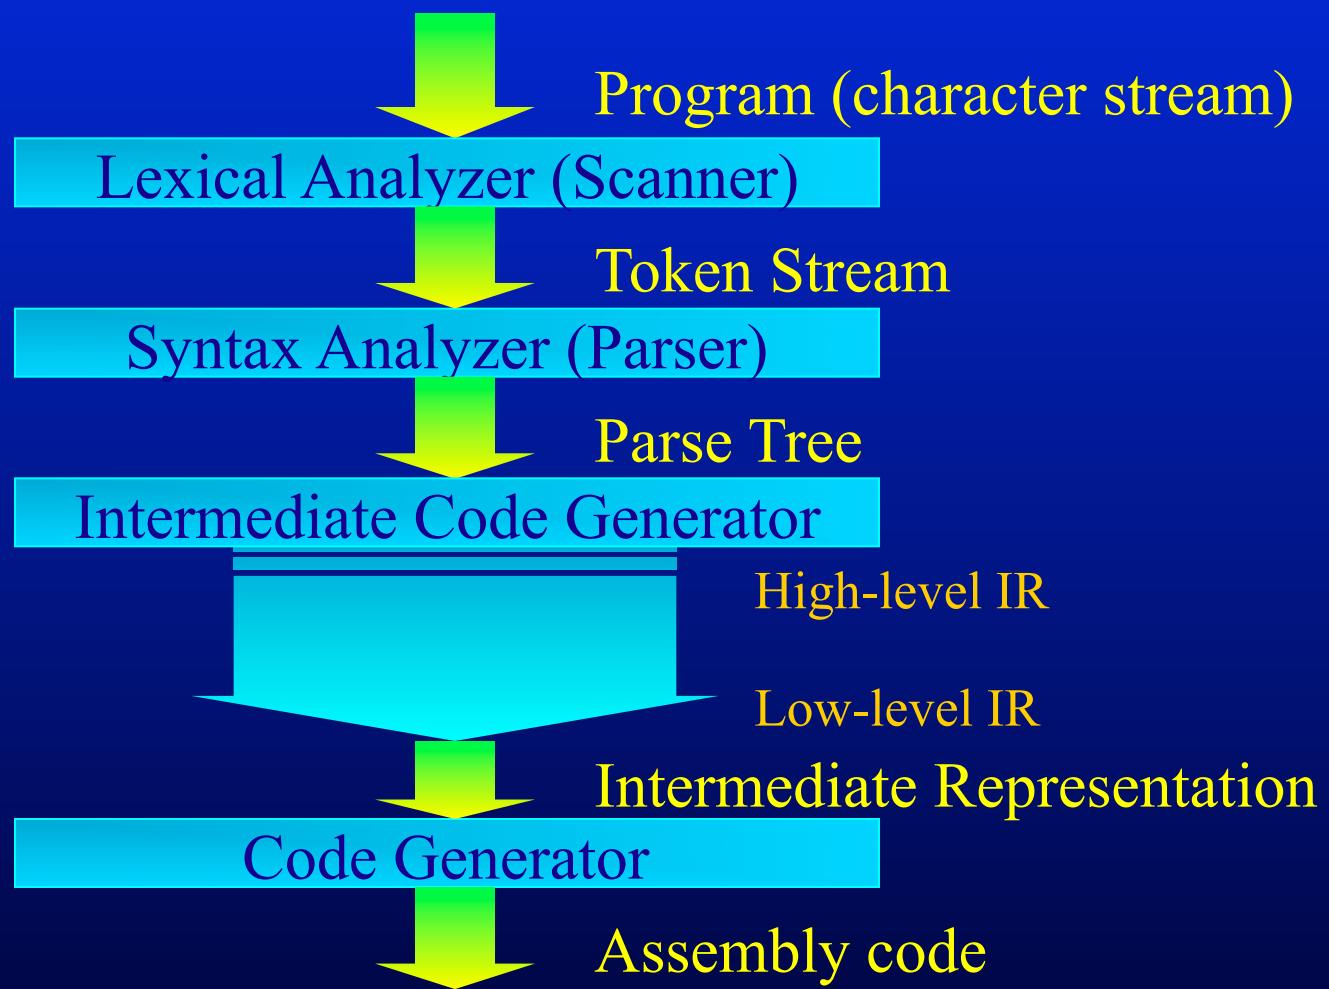

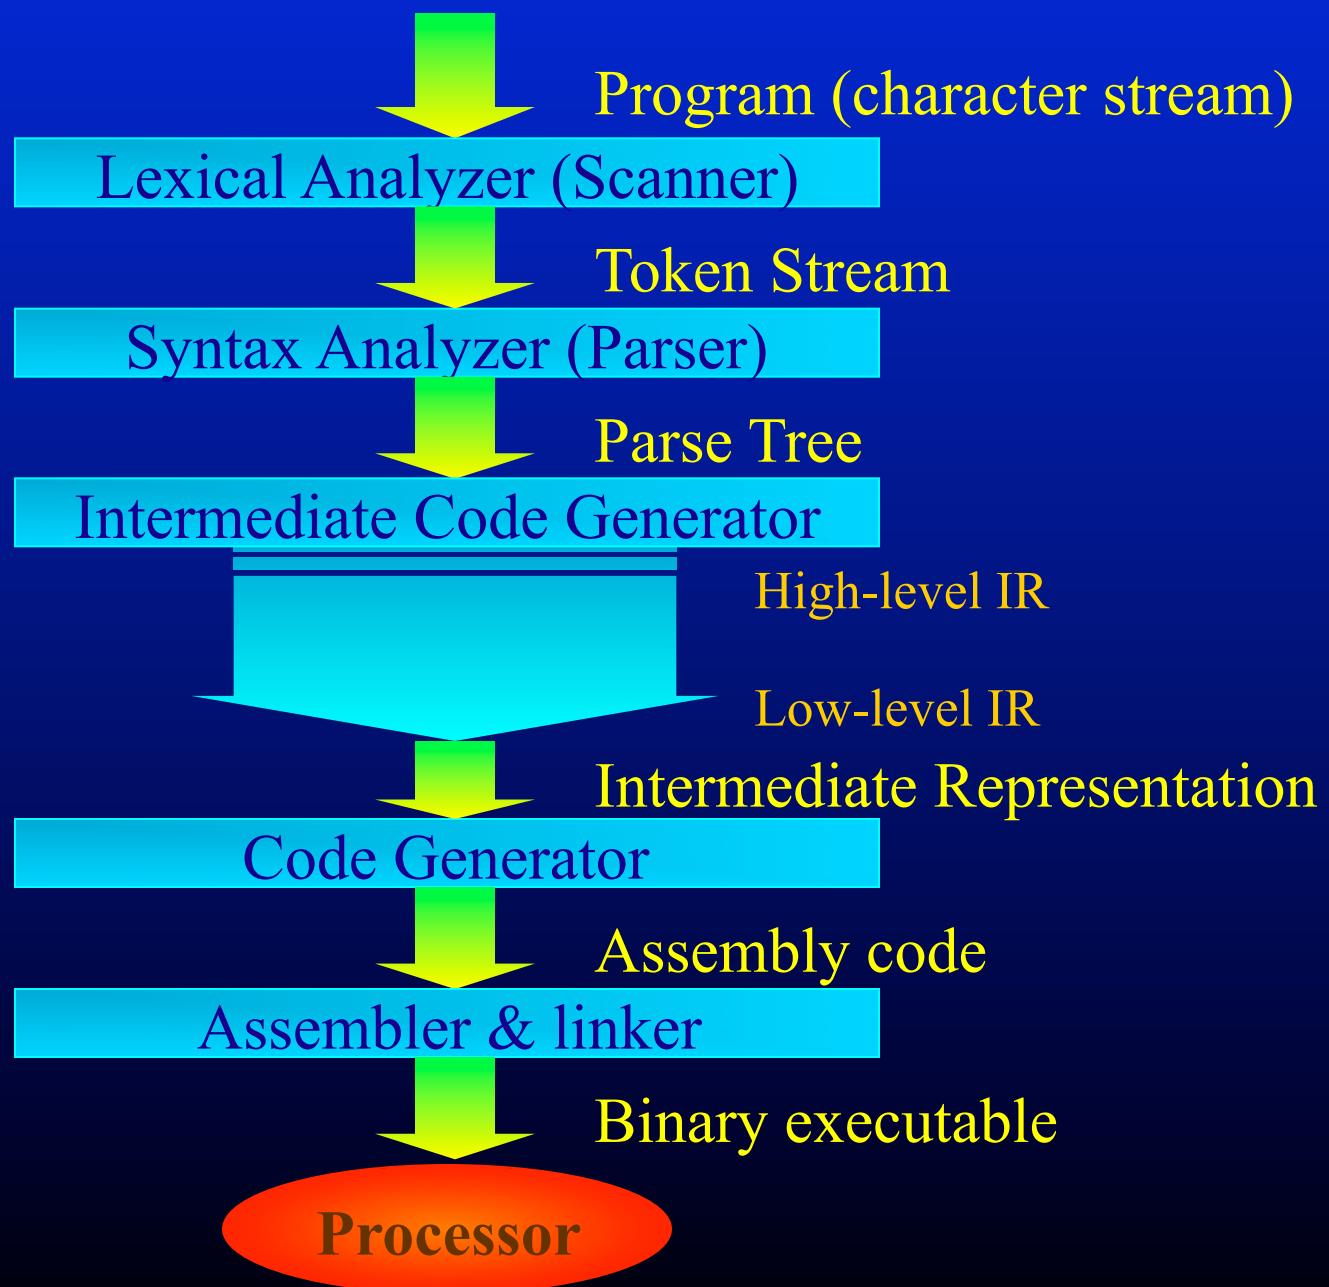

Assembly language

- Advantages
 - Simplifies code generation due to use of symbolic instructions and symbolic names
 - Logical abstraction layer
 - Multiple Architectures can describe by a single assembly language
⇒ can modify the implementation
 - macro assembly instructions
- Disadvantages
 - Additional process of assembling and linking
 - Assembler adds overhead

Assembly language

- Relocatable machine language (object modules)
 - all locations(addresses) represented by symbols
 - Mapped to memory addresses at link and load time
 - Flexibility of separate compilation
- Absolute machine language
 - addresses are hard-coded
 - simple and straightforward implementation
 - inflexible -- hard to reload generated code
 - Used in interrupt handlers and device drivers

Assembly example

```

0000 6572726F7200    .LC0:          .section    .rodata
                        .string "error"
                        .text
.globl fact
fact:
0000 55               pushq      %rbp
0001 4889E5            movq       %rsp, %rbp
0004 4883EC10          subq       $16, %rsp
0008 897DFC            movl       %edi, -4(%rbp)
000b 837DFC00          cmpl       $0, -4(%rbp)
000f 7911              jns        .L2
0011 BF00000000         movl       $.LC0, %edi
0016 B800000000         movl       $0, %eax
001b E800000000         call       printf
0020 EB22              jmp        .L3
.L2:
0022 837DFC00          cmpl       $0, -4(%rbp)
0026 7509              jne        .L4
0028 C745F8010000000   movl       $1, -8(%rbp)
002f EB13              jmp        .L3
.L4:
0031 8B7DFC            movl       -4(%rbp), %edi
0034 FFCF              decl       %edi
0036 E800000000         call       fact
003b 0FAF45FC           imull     -4(%rbp), %eax
003f 8945F8             movl       %eax, -8(%rbp)
0042 EB00              jmp        .L1
.L3:
0044 8B45F8            movl       -8(%rbp), %eax
0047 C9                leave
0048 C3                ret

```

Composition of an Object File

- We use the ELF file format
- The object file has:
 - Multiple Segments
 - Symbol Information
 - Relocation Information
- Segments
 - Global Offset Table
 - Procedure Linkage Table
 - Text (code)
 - Data
 - Read Only Data

```
.file  "test2.c"
      .section        .rodata
.LC0:
      .string "error %d"

      .section        .text
.globl fact
fact:
      pushq  %rbp
      movq   %rsp, %rbp
      subq   $16, %rsp
      movl   -8(%rbp), %eax
      leave
      ret
.

.comm  bar,4,4
.comm  a,1,1
.comm  b,1,1


      .section        .eh_frame,"a",@progbits
      .long   .LECIE1-.LSCIE1
      .long   0x0
      .byte   0x1
      .string ""
      .uleb128 0x1
```

Outline

- Introduction
- Machine Language
- **Overview of a modern processor**
- Memory Layout
- Procedure Abstraction
- Procedure Linkage
- Guidelines in Creating a Code Generator

Overview of a modern processor

- ALU
- Control
- Memory
- Registers

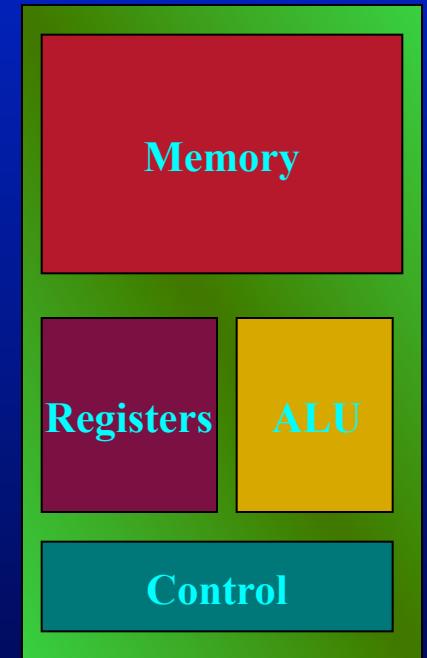

Arithmetic and Logic Unit

- Performs most of the data operations
- Has the form:
 $OP \langle oprnd_1 \rangle, \langle oprnd_2 \rangle$
 - $\langle oprnd_2 \rangle = \langle oprnd_1 \rangle OP \langle oprnd_2 \rangle$


Or

 $OP \langle oprnd_1 \rangle$
- Operands are:
 - Immediate Value \$25
 - Register %rax
 - Memory 4(%rbp)
- Operations are:
 - Arithmetic operations (add, sub, imul)
 - Logical operations (and, sal)
 - Unitary operations (inc, dec)




Arithmetic and Logic Unit

- Many arithmetic operations can cause an exception
 - overflow and underflow
- Can operate on different data types
 - addb 8 bits
 - addw 16 bits
 - addl 32 bits
 - addq 64 bits (Decaf is all 64 bit)
 - signed and unsigned arithmetic
 - Floating-point operations (separate ALU)

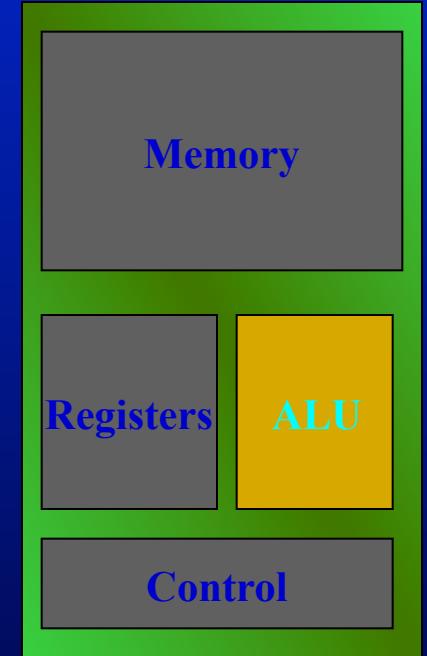


Control

- Handles the instruction sequencing
- Executing instructions
 - All instructions are in memory
 - Fetch the instruction pointed by the PC and execute it
 - For general instructions, increment the PC to point to the next location in memory

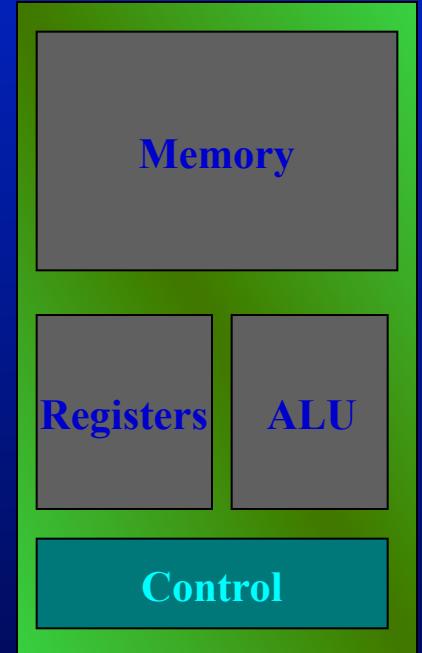


Control

- Unconditional Branches
 - Fetch the next instruction from a different location
 - Unconditional jump to an address
`jmp .L32`
 - Unconditional jump to an address in a register
`jmp %rax`
 - To handle procedure calls
`call fact` `call %r11`

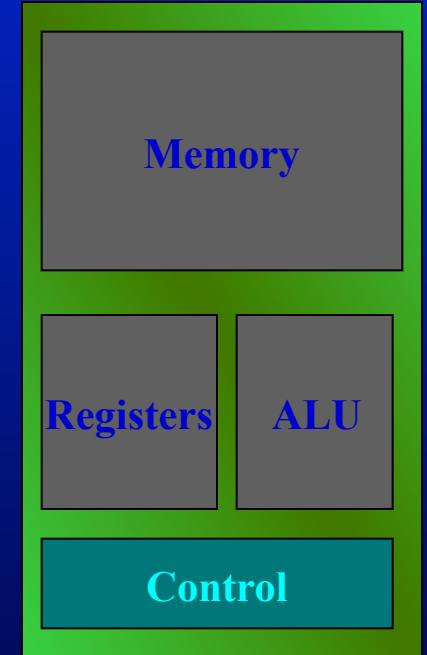


Control

- All arithmetic operations update the condition codes (rFLAGS)
- Compare explicitly sets the rFLAGS
 - cmp \$0, %rax
- Conditional jumps on the rFLAGS
 - Jxx .L32 Jxx 4(%rbp)
 - Examples:
 - JO Jump Overflow
 - JC Jump Carry
 - JAE Jump if above or equal
 - JZ Jump is Zero
 - JNE Jump if not equal

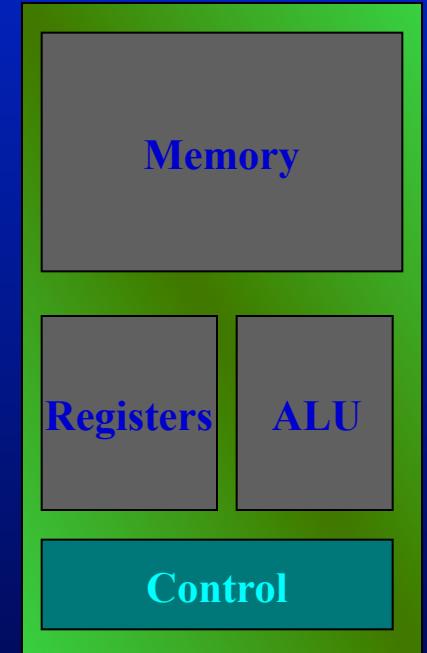

Control

- Control transfer in special (rare) cases
 - traps and exceptions
 - Mechanism
 - Save the next(or current) instruction location
 - find the address to jump to (from an exception vector)
 - jump to that location

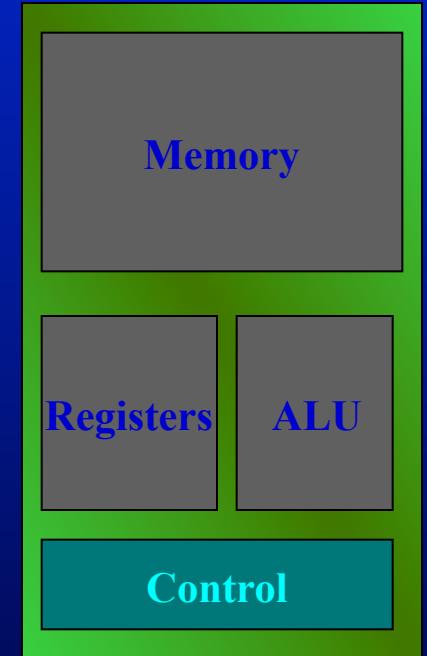


When to use what?



- Give an example where each of the branch instructions can be used
 1. jmp L0
 2. call L1
 3. jmp %rax
 4. jz -4(%rbp)
 5. jne L1

Memory

- Flat Address Space
 - composed of words
 - byte addressable
- Need to store
 - Program
 - Local variables
 - Global variables and data
 - Stack
 - Heap

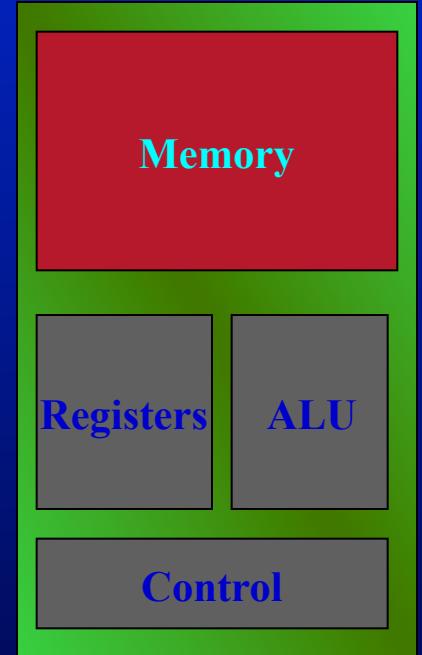


Memory

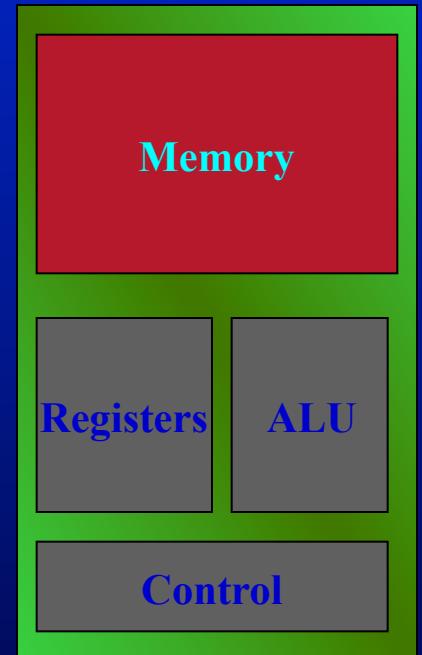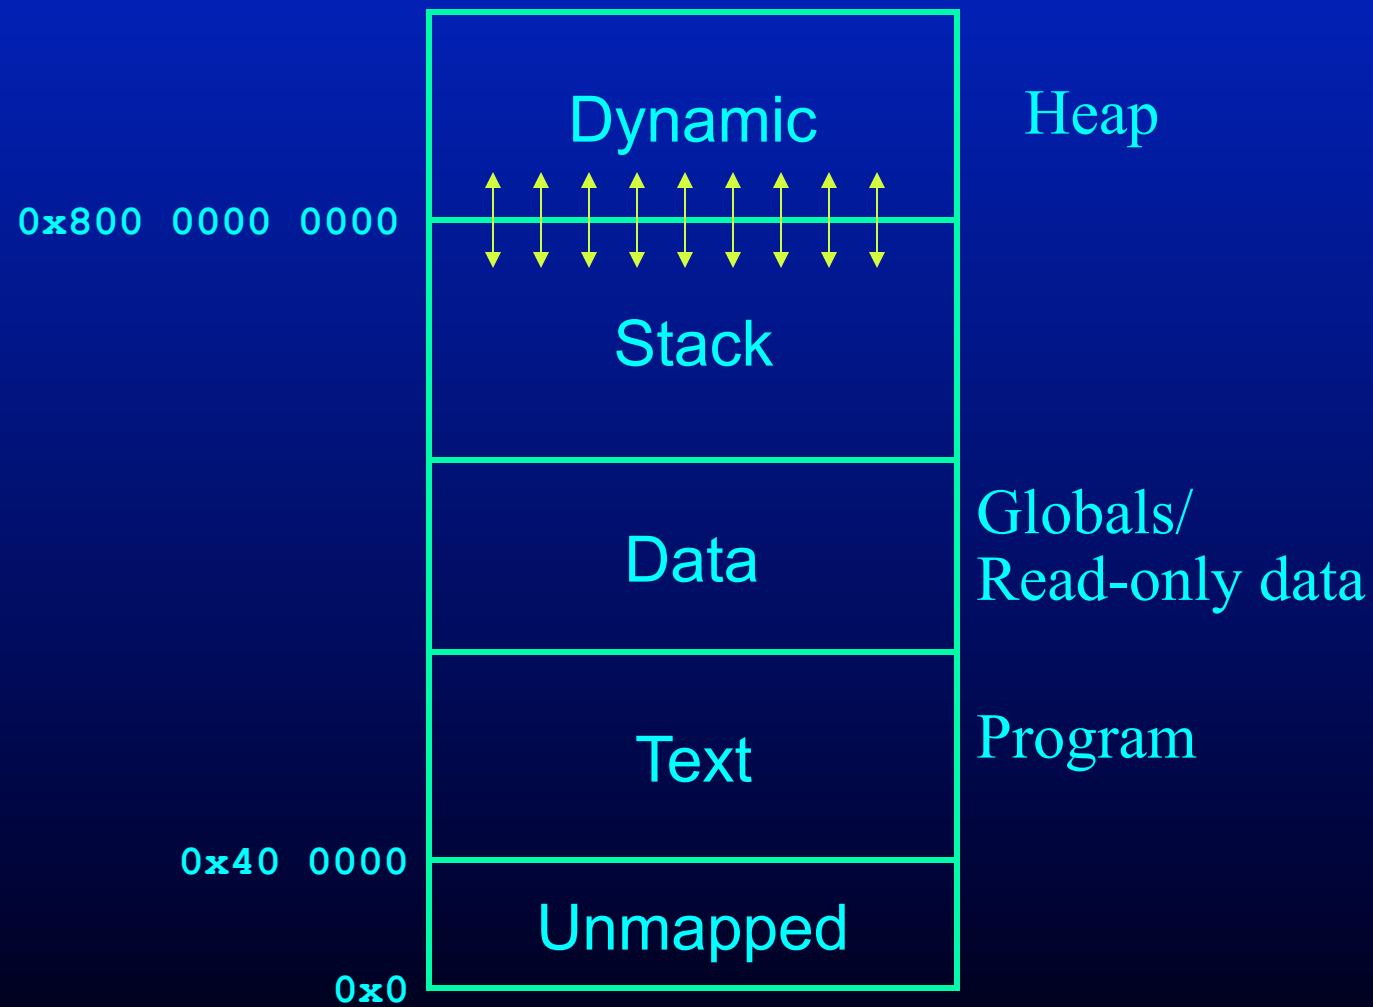


Registers

- Instructions allow only limited memory operations
 - ~~add -4(%rbp), -8(%rbp)~~
 - add %r10, -8(%rbp)
- Important for performance
 - limited in number
- Special registers
 - %rbp base pointer
 - %rsp stack pointer

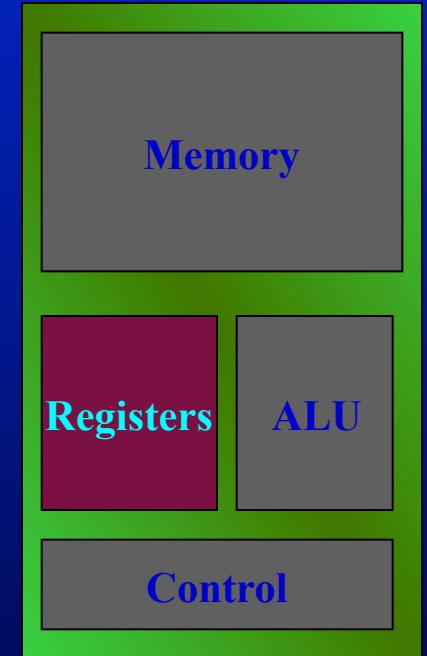


Moving Data

- `mov source dest`
 - Moves data
 - from one register to another
 - from registers to memory
 - from memory to registers
- `push source`
 - Pushes data into the stack
- `pop dest`
 - Pops data from the stack to *dest*

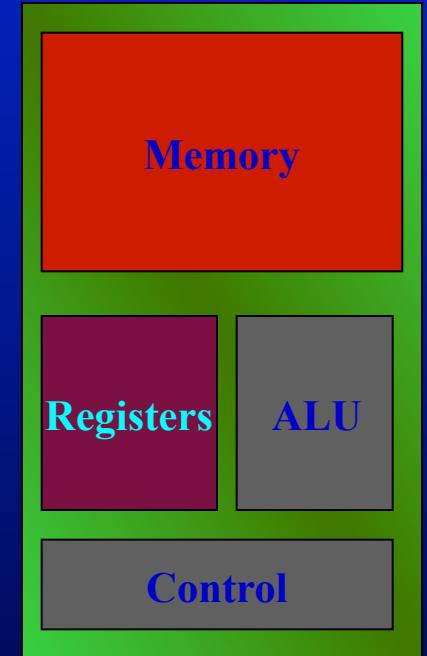

Other interactions

- Other operations
 - Input/Output
 - Privilege / secure operations
 - Handling special hardware
 - TLBs, Caches etc.
- Mostly via system calls
 - hand-coded in assembly
 - compiler can treat them as a normal function call

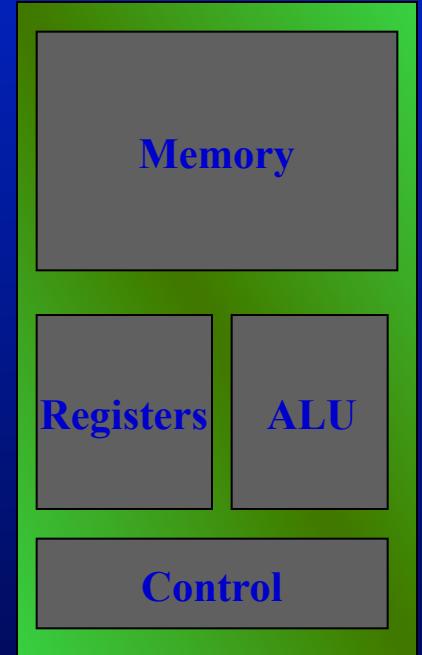

Outline



- Introduction
- Machine Language
- Overview of a modern processor
- **Memory Layout**
- Procedure Abstraction
- Procedure Linkage
- Guidelines in Creating a Code Generator

Components of a High Level Language



Memory Layout

- Heap management
 - free lists
- starting location in the text segment

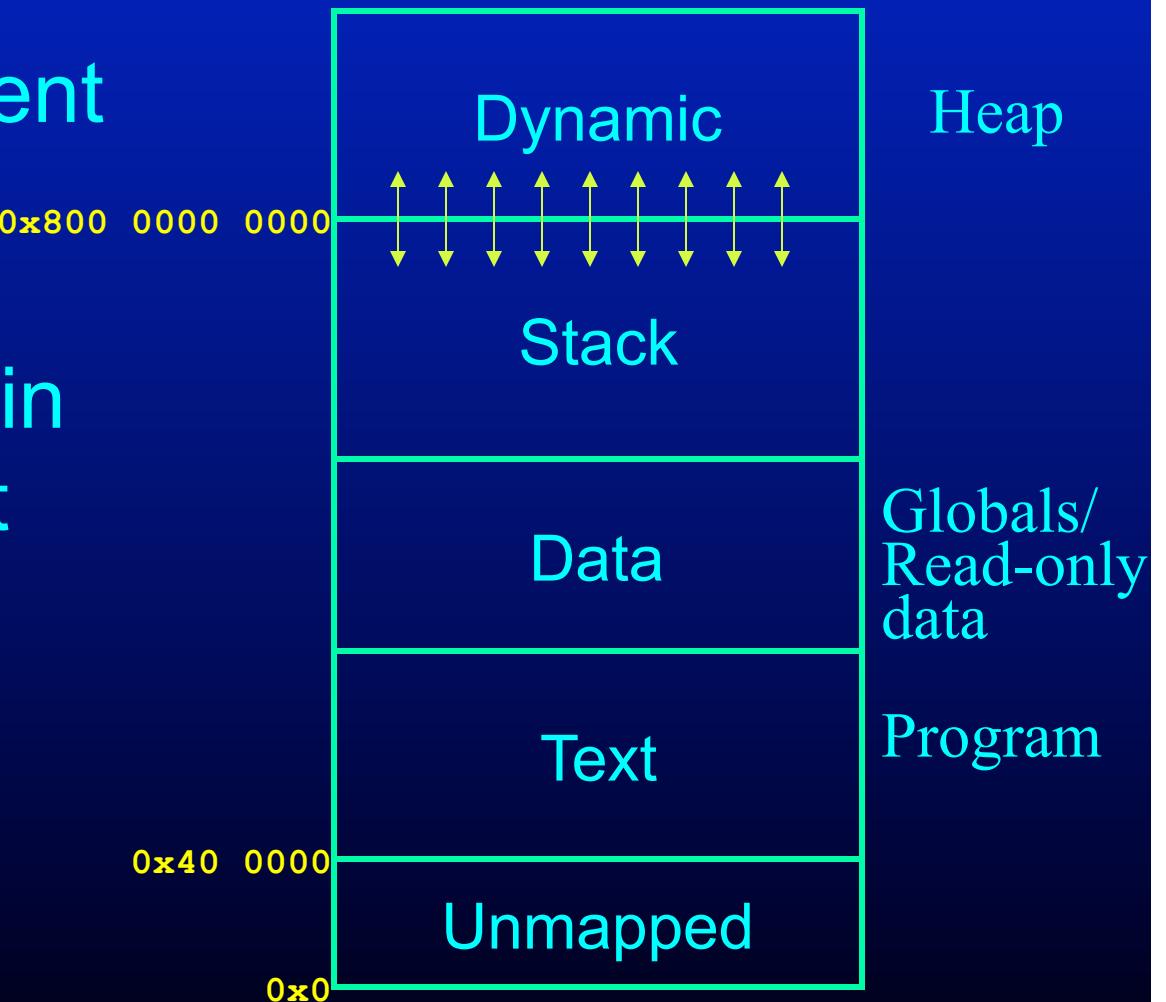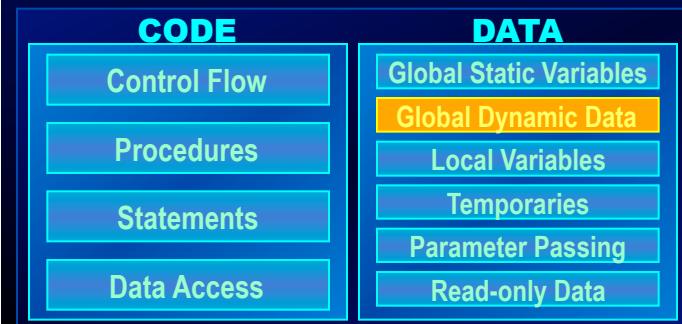

Allocating Read-Only Data

- All Read-Only data in the text segment
- Integers
 - use load immediate
- Strings
 - use the .string macro

```
.section .text
.globl main
main:
    enter    $0, $0
    movq    $5, x(%rip)
    push    x(%rip)
    push    $.msg
    call    printf_035
    add    $16, %rsp
    leave
    ret
```

```
.msg:
.string "Five: %d\n"
```



Global Variables

- Allocation: Use the assembler's .comm directive
- Use PC relative addressing
 - %rip is the current instruction address
 - X(%rip) will add the offset from the current instruction location to the space for x in the data segment to %rip
 - Creates easily relocatable binaries

```
.section .text
.globl main
main:
    enter    $0, $0
    movq    $5, x(%rip)
    push    x(%rip)
    call    printf_035
    add     $16, %rsp
    leave
    ret

.comm    x, 8
```

.comm *name*, *size*, *alignment*

The .comm directive allocates storage in the data section. The storage is referenced by the identifier *name*. *Size* is measured in bytes and must be a positive integer. *Name* cannot be predefined. *Alignment* is optional. If *alignment* is specified, the address of *name* is aligned to a multiple of *alignment*.



Outline

- Introduction
- Machine Language
- Overview of a modern processor
- Memory Layout
- **Procedure Abstraction**
- Procedure Linkage
- Guidelines in Creating a Code Generator

Procedure Abstraction

- Requires system-wide compact
 - Broad agreement on memory layout, protection, resource allocation calling sequences, & error handling
 - Must involve architecture (ISA), OS, & compiler
- Provides shared access to system-wide facilities
 - Storage management, flow of control, interrupts
 - Interface to input/output devices, protection facilities, timers, synchronization flags, counters, ...
- Establishes the need for a private context
 - Create private storage for each procedure invocation
 - Encapsulate information about control flow & data abstractions

The procedure abstraction is a *social contract* (Rousseau)

Procedure Abstraction

- In practical terms it leads to...
 - multiple procedures
 - library calls
 - compiled by many compilers, written in different languages, hand-written assembly
- For the project, we need to worry about
 - Parameter passing
 - Registers
 - Stack
 - Calling convention

Parameter passing disciplines

- Many different methods
 - call by reference
 - call by value
 - call by value-result (copy-in/copy-out)

Parameter Passing Disciplines

```
Program {
    int A;
    foo(int B) {
        B = B + 1
        B = B + A
    }
    Main() {
        A = 10;
        foo(A);
    }
}
```

- Call by value A is ???
- Call by reference A is ???
- Call by value-result A is ???

Parameter Passing Disciplines

```
Program {
    int A;
    foo(int B) {
        B = B + 1
        B = B + A
    }
    Main() {
        A = 10;
        foo(A);
    }
}
```

- Call by value A is 10
- Call by reference A is 22
- Call by value-result A is 21

Parameter passing disciplines

- Many different methods
 - call by reference
 - call by value
 - call by value-result
- How do you pass the parameters?
 - via. the stack
 - via. the registers
 - or a combination
- In the Decaf calling convention, the first 6 parameters are passed in registers.
 - The rest are passed in the stack

Registers

- What to do with live registers across a procedure call?
 - Caller Saved
 - Callee Saved

Question:


- What are the advantages/disadvantages of:
 - Callee saving of registers?
 - Caller saving of registers?
- What registers should be used at the caller and callee if half is caller-saved and the other half is callee-saved?

Registers

- What to do with live registers across a procedure call?
 - Caller Saved
 - Callee Saved
- In this segment, use registers only as short-lived temporaries
 - mov -4(%rbp), %r10
 - mov -8(%rbp), %r11
 - add %r10, %r11
 - mov %r11, -8(%rbp)
 - Should not be live across procedure calls
 - Will start keeping data in the registers for performance in Segment V

The Stack

- Arguments 0 to 6 are in:
 - %rdi, %rsi, %rdx, %rcx, %r8 and %r9

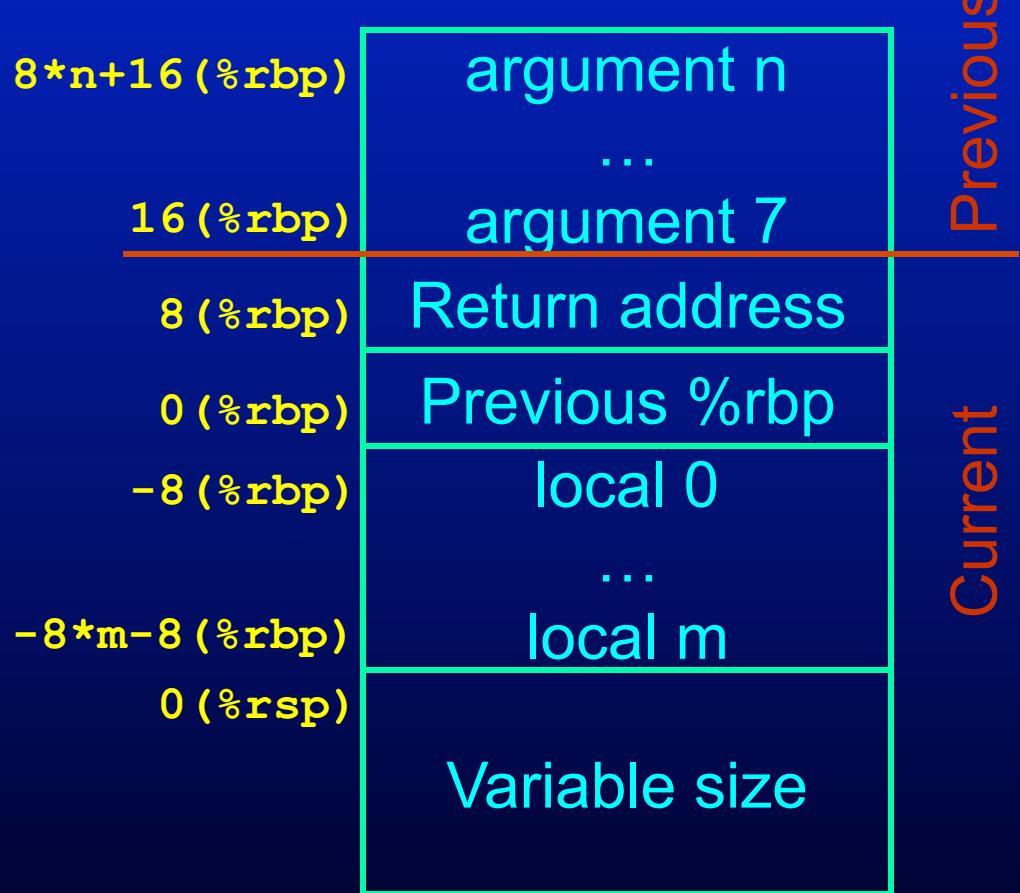

Question:


- Why use a stack? Why not use the heap or pre-allocated in the data segment?

Outline

- Introduction
- Machine Language
- Overview of a modern processor
- Memory Layout
- Procedure Abstraction
- **Procedure Linkage**
- Guidelines in Creating a Code Generator

Procedure Linkages

Standard procedure linkage

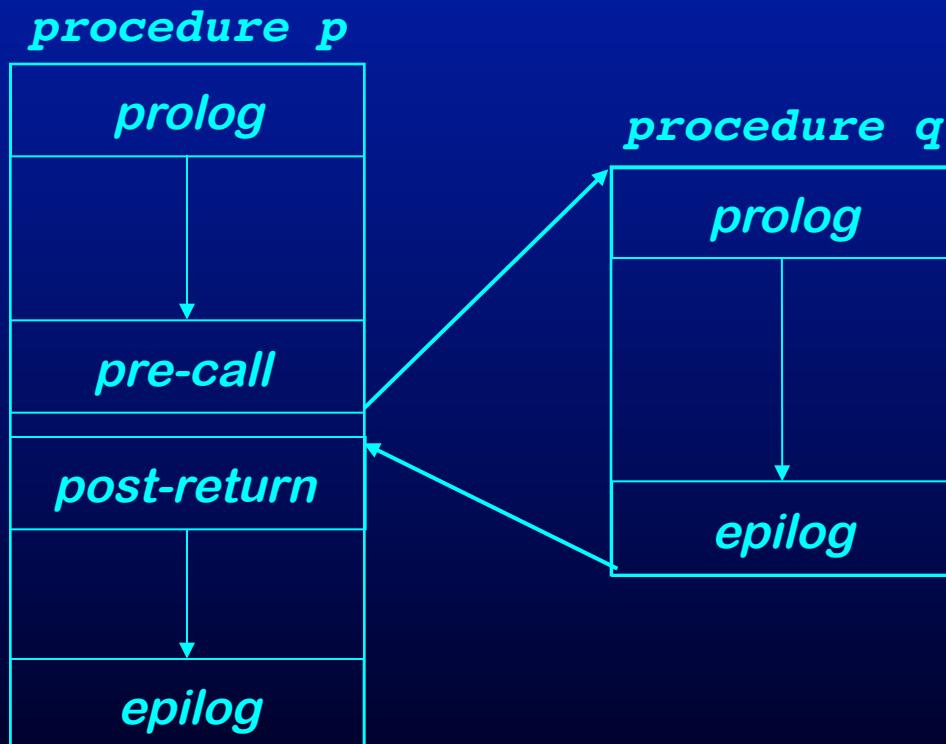

Procedure has

- standard prolog
- standard epilog


Each call involves a

- pre-call sequence
- post-return sequence

Stack

- Calling: Caller
 - Assume %rcx is live and is caller save
 - Call foo(A, B, C, D, E, F, G, H, I)
 - A to I are at -8(%rbp) to -72(%rbp)


```
push    %rcx
push    -72(%rbp)
push    -64(%rbp)
push    -56(%rbp)
mov     -48(%rbp), %r9
mov     -40(%rbp), %r8
mov     -32(%rbp), %rcx
mov     -24(%rbp), %rdx
mov     -16(%rbp), %rsi
mov     -8(%rbp), %rdi
call   foo
```

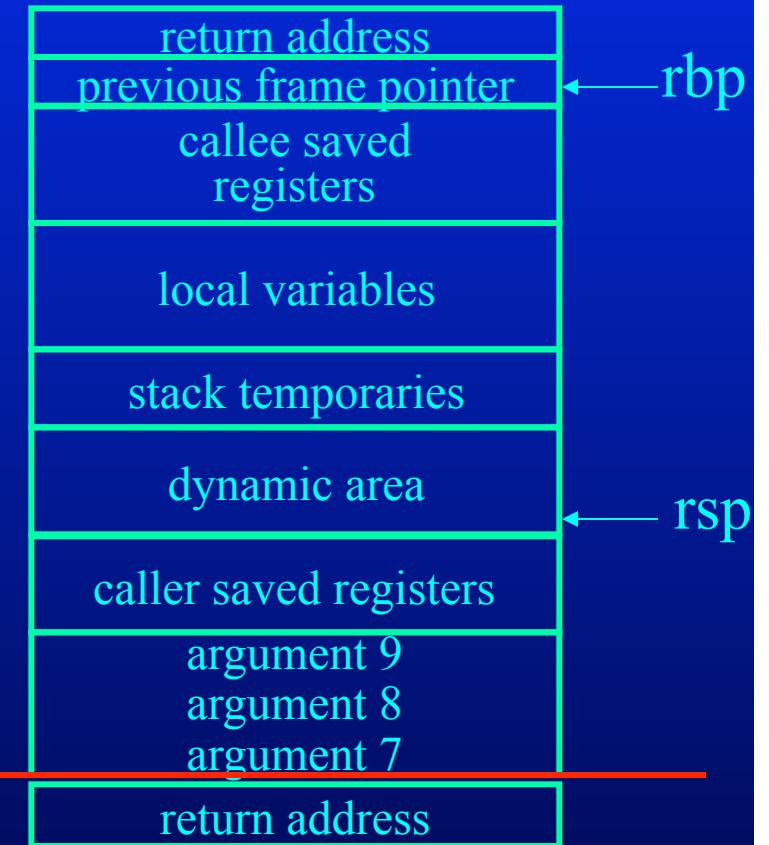

Stack

- Calling: Callee
 - Assume %rbx is used in the function and is callee save
 - Assume 40 bytes are required for locals

```
foo:  
    push    %rbp  
    enter  
    mov     %rsp, %rbp  
    sub    $48, %rsp  
    mov     %rbx, -8(%rbp)
```

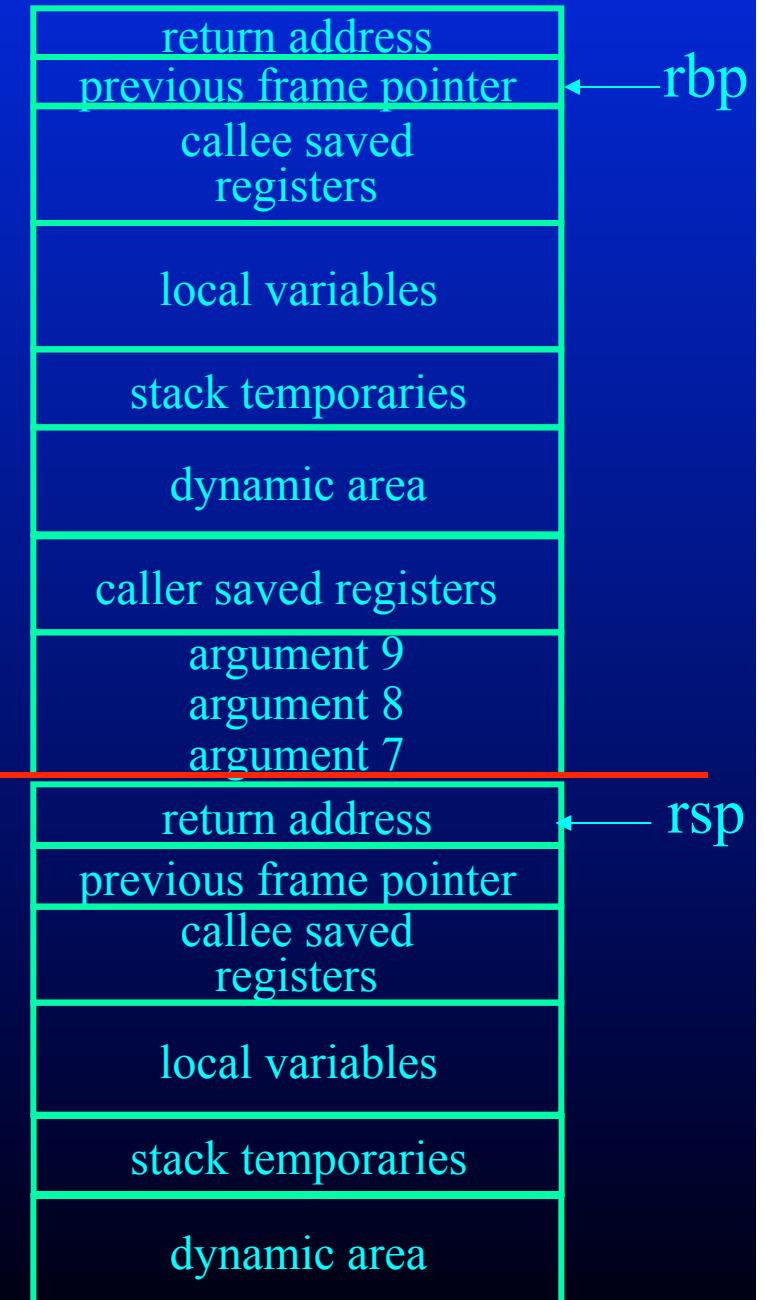

Stack

- Arguments
- Call foo(A, B, C, D, E, F, G, H, I)
 - Passed in by pushing before the call

```

push    -72(%rbp)
push    -64(%rbp)
push    -56(%rbp)
mov     -48(%rbp), %r9
mov     -40(%rbp), %r8
mov     -32(%rbp), %rcx
mov     -24(%rbp), %rdx
mov     -16(%rbp), %rsi
mov     -8(%rbp), %rdi
call    foo


```

- Access A to F via registers
 - or put them in local memory
- Access rest using 16+xx(%rbp)

```

mov     16(%rbp), %rax
mov     24(%rbp), %r10

```

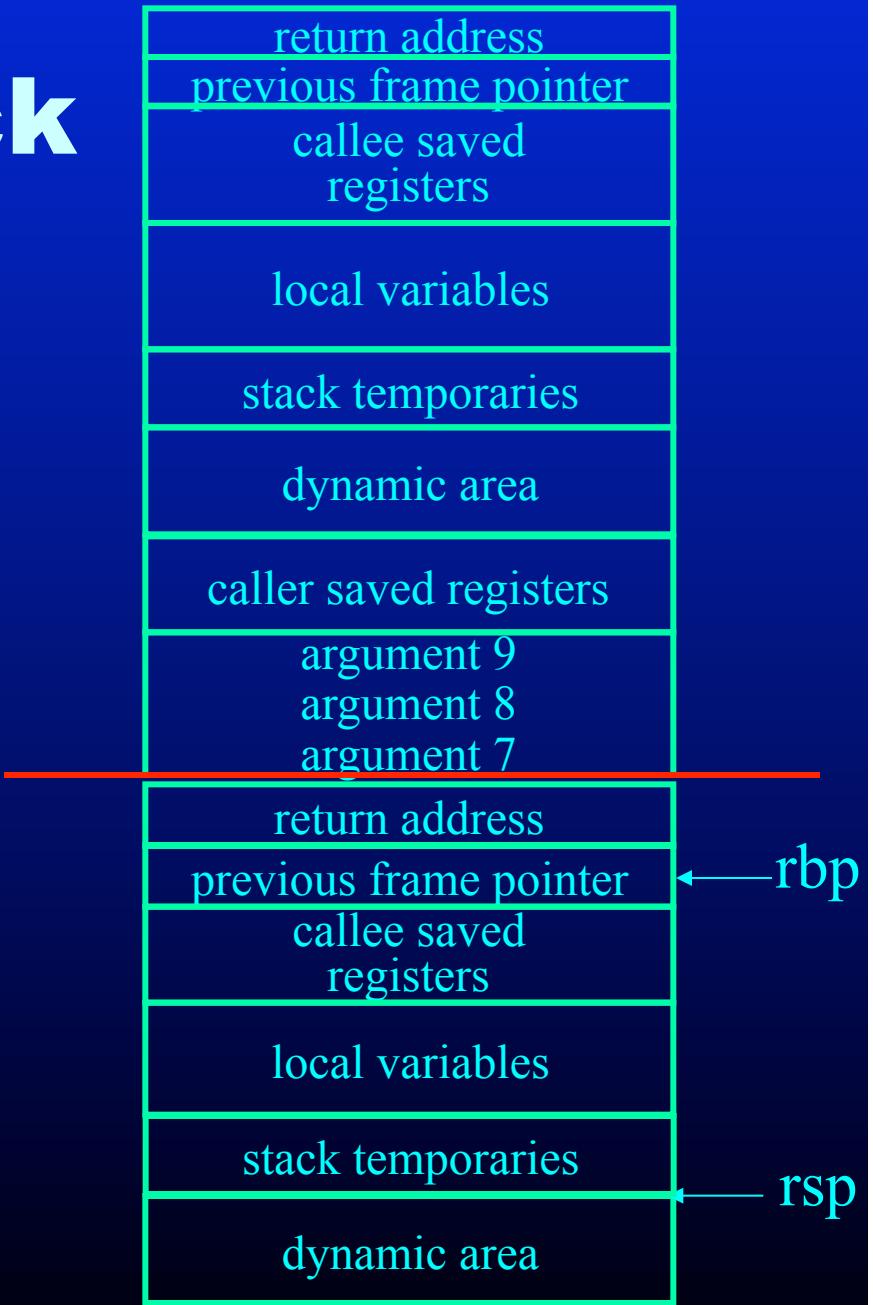

Stack

- Locals and Temporaries
 - Calculate the size and allocate space on the stack


sub \$48, %rsp

or enter \$48, 0

- Access using -8-xx(%rbp)

mov -28(%rbp), %r10


mov %r11, -20(%rbp)

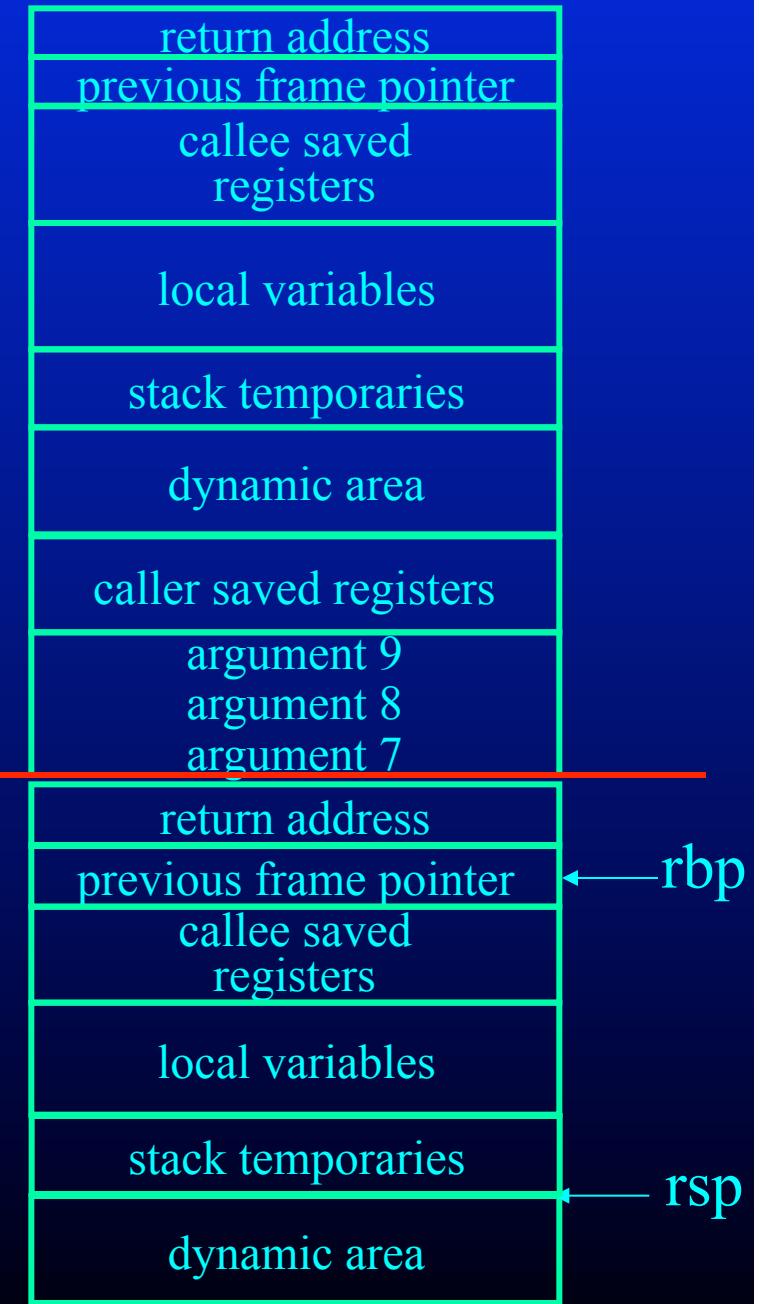

Stack


- Returning From Callee
 - Assume the return value is the first temporary
 - Restore the caller saved register
 - Put the return value in %rax
 - Tear down the call stack

```
mov        -8(%rbp), %rbx
mov        -16(%rbp), %rax
mov      %rbp, %rsp
leave
pop        %rbp
ret
```

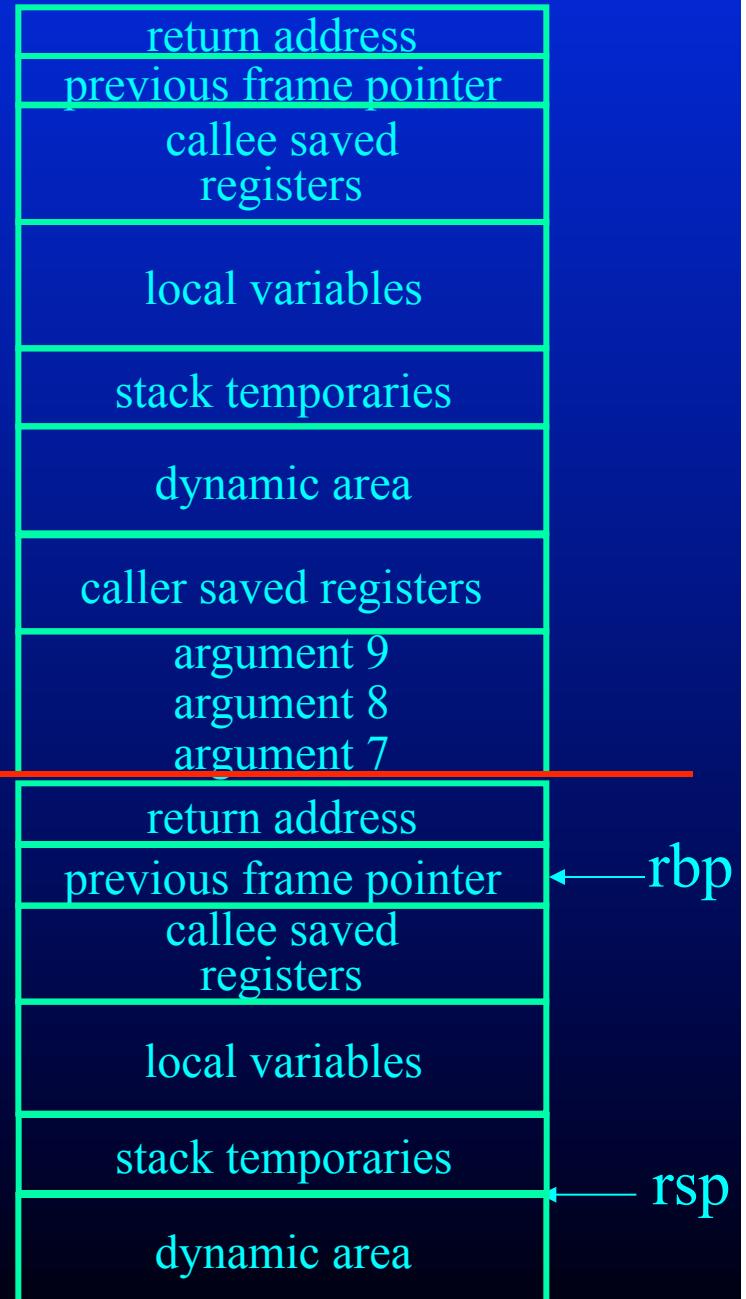

Stack

- Returning Caller
 - Assume the return value goes to the first temporary
 - Restore the stack to reclaim the argument space
 - Restore the caller save registers

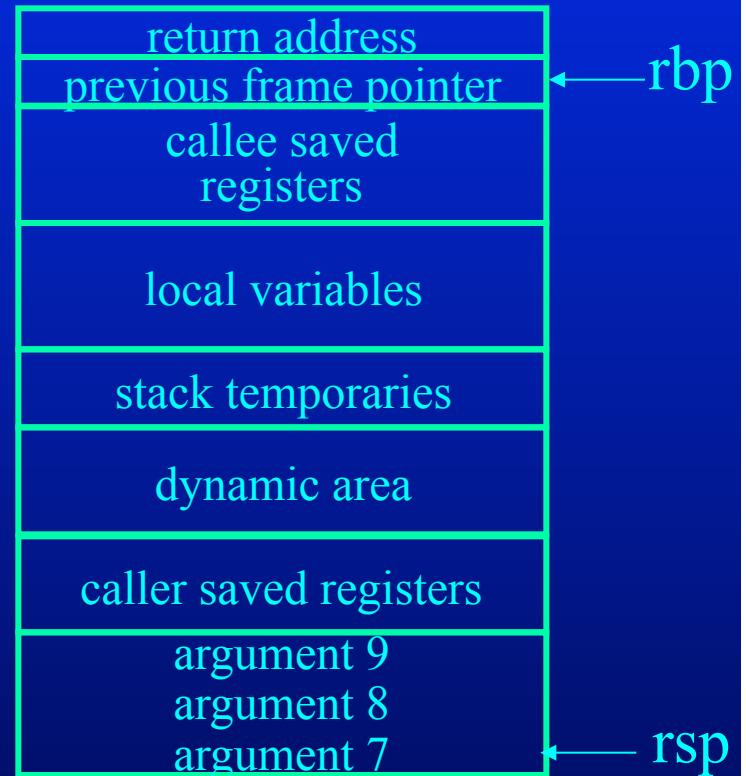

```
call    foo  
add    $24, %rsp  
pop    %rcx  
mov    %rax, 8(%rbp)  
...  
...
```



Question:

- Do you need the \$rbp?
- What are the advantages and disadvantages of having \$rbp?

Outline

- Introduction
- Machine Language
- Overview of a modern processor
- Memory Layout
- Procedure Abstraction
- Procedure Linkage
- **Guidelines in Creating a Code Generator**

What We Covered Today..

CODE

Procedures

Control Flow

Statements

Data Access

DATA

Global Static Variables

Global Dynamic Data

Local Variables

Temporaries

Parameter Passing

Read-only Data

Guidelines for the code generator

- Lower the abstraction level slowly
 - Do many passes, that do few things (or one thing)
 - Easier to break the project down, generate and debug
- Keep the abstraction level consistent
 - IR should have ‘correct’ semantics at all time
 - At least you should know the semantics
 - You may want to run some of the optimizations between the passes.
- Use assertions liberally
 - Use an assertion to check your assumption

Guidelines for the code generator

- Do the simplest but dumb thing
 - it is ok to generate $0 + 1*x + 0*y$
 - Code is painful to look at, but will help optimizations
- Make sure you know what can be done at...
 - Compile time in the compiler
 - Runtime using generated code

Guidelines for the code generator

- Remember that optimizations will come later
 - Let the optimizer do the optimizations
 - Think about what optimizer will need and structure your code accordingly
 - Example: Register allocation, algebraic simplification, constant propagation
- Setup a good testing infrastructure
 - regression tests
 - If a input program creates a bug, use it as a regression test
 - Learn good bug hunting procedures
 - Example: binary search